



OKS 670 - Product Information

Fields of Application:

Lubrication wherever a good gap penetrating capacity is the only possibility for relubrication, e.g. of joints, hinges, linkages, levers, guides and machine elements of transport machines, packaging machines, automatic filling machines etc. exposed to moisture.

OKS 670

High-Performance Lube Oil with white solid lubricants

Advantages and Benefits:

Light-coloured, high lubricating effect due to optimum product formula. Easy penetration even in narrow, hard-to-reach lubricating gaps. Broad range of uses in all maintenance sectors. With Mo_x active to improve performance. Good lubricating and pressure absorption capacity combined with excellent wetting and penetration properties. Results in temporary corrosion protection.

Application:


For best results, first clean mechanically and then with OKS 2610/OKS 2611 Universal cleaner. Stir product before use. Apply on a sufficient amount by brush, Drop oiler, oil can or dipping. Remove excess. Mix only with suitable lubricants. For additional questions please contact our Technical Department.

Additional Information:

Packaging (Article number):

- 5 l Canister (00670050)
- 25 l Canister (00670062)
- 200 l Drum (00670072)

Version
E-05.1/05

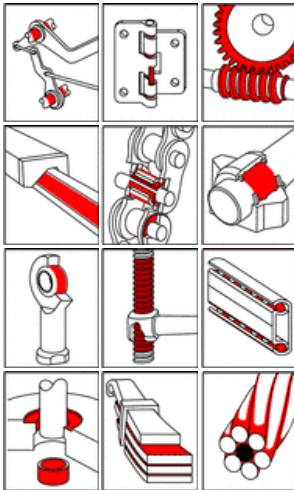

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. ® = Registered Trademark

**OKS 670****High-Performance Lube Oil with white solid lubricants****Technical Data**

	Norm	Conditions	Unit	Value
Classification	DIN 51 502			CLF 46
Base Oil				
Type				Mineral oil
Viscosity	DIN 51 562-1	+40°C	mm ² /s	42
Viscosity class	DIN 51 519	DIN 51 562-1, 40°C	ISO VG- Klasse	46
Flash point	DIN ISO 2592	> 79	°C	115
Additives				
Solid lubricants, type				White solid lubricants
Additives				Mo _x -Active
Application Data				
Density	DIN EN ISO 3838	+20°C	g/ml	0,90
Colour				Light-coloured
Service Temperatures				
Lower service temperature			°C	-30
Maximum service temperature			°C	80
Wear Protection Tests				
VBT- weld load (Four ball test rig)	DIN 51 350-4		N	3.000
VBT- wear	DIN 51 350-5	1.420 U/min/1 h/800 N	mm	1,2

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. © = Registered Trademark